

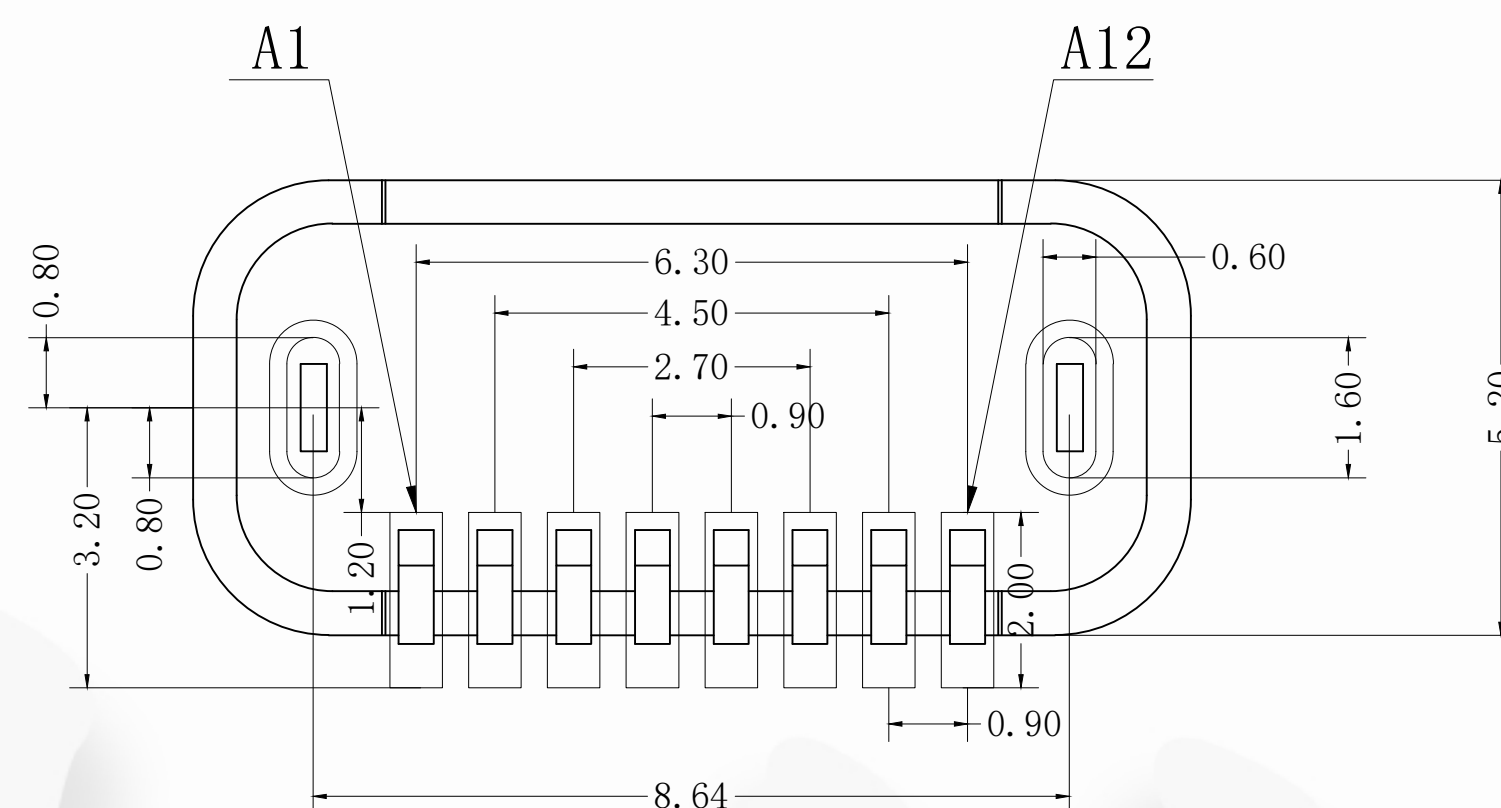


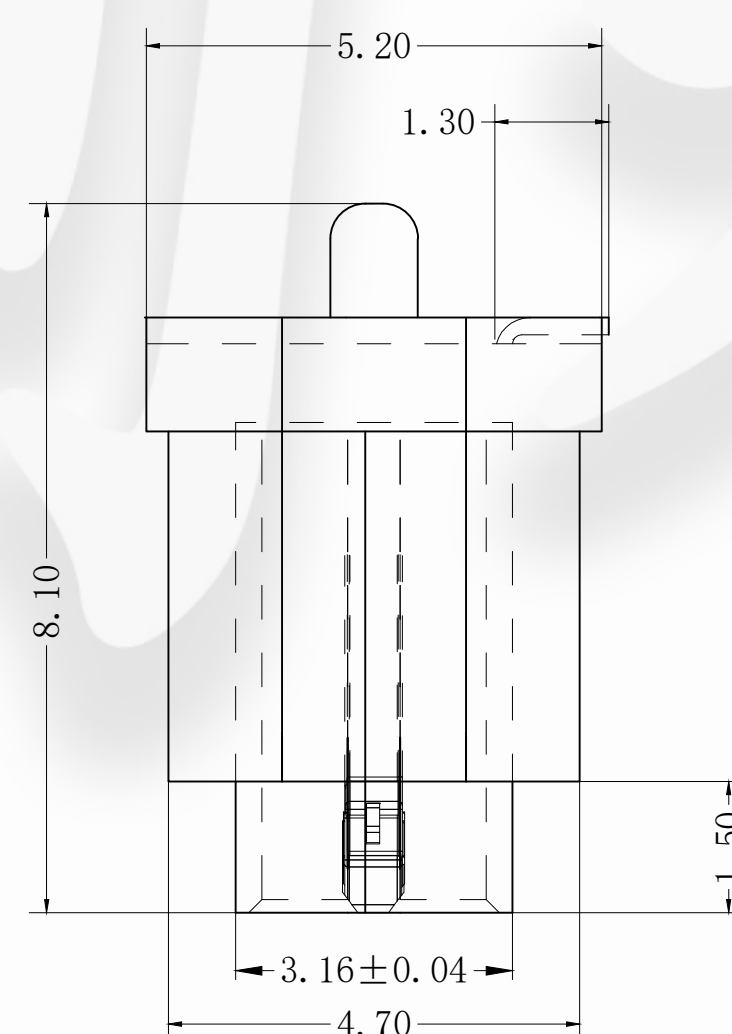

1. 材料
 - A. 主体: LCP, 黑色, 白色, UL 94-V0;
 - B. 端子: H65铜, 电镀刷金;
 - C. 外壳: 不锈钢, 镀全镍;
2. 主要特性
 - A. 电压等级: 20V AC;
 - B. 电流: 3A;
 - C. 工作温度: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$;
3. 电气要求:
 - A. 接触电阻: 40mΩ Max, (初始), 50mΩ Max. (最后);
 - B. 电压: 100V AC 1分钟;
 - C. 绝缘电阻: 100MΩ min. DC 500v;
4. 机械性能:
 - A. 插入力: 5~20N. (从1~10,000次);
 - B. 拔出力: 8~20N. (从1~1,000次);
6~20N. (从1,001~10,000次);
 - C. 耐久性寿命: 10,000次;



CUSTOMER DRAWING			铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd		
UNITS mm	SCALE 1:1	SHEET			
PROJECTION: 		DRAW: DAP	TITLE 防水TYPE C母座8PIN 立贴 L=6.8		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±3°		CHECK: HWT	MAT'L SEE TABLE		FINISH SEE TABLE
		APPD: HHM	DWG. NO. 1513.WPCF.8LS.G74		PART NO. _____ SIZE A4