

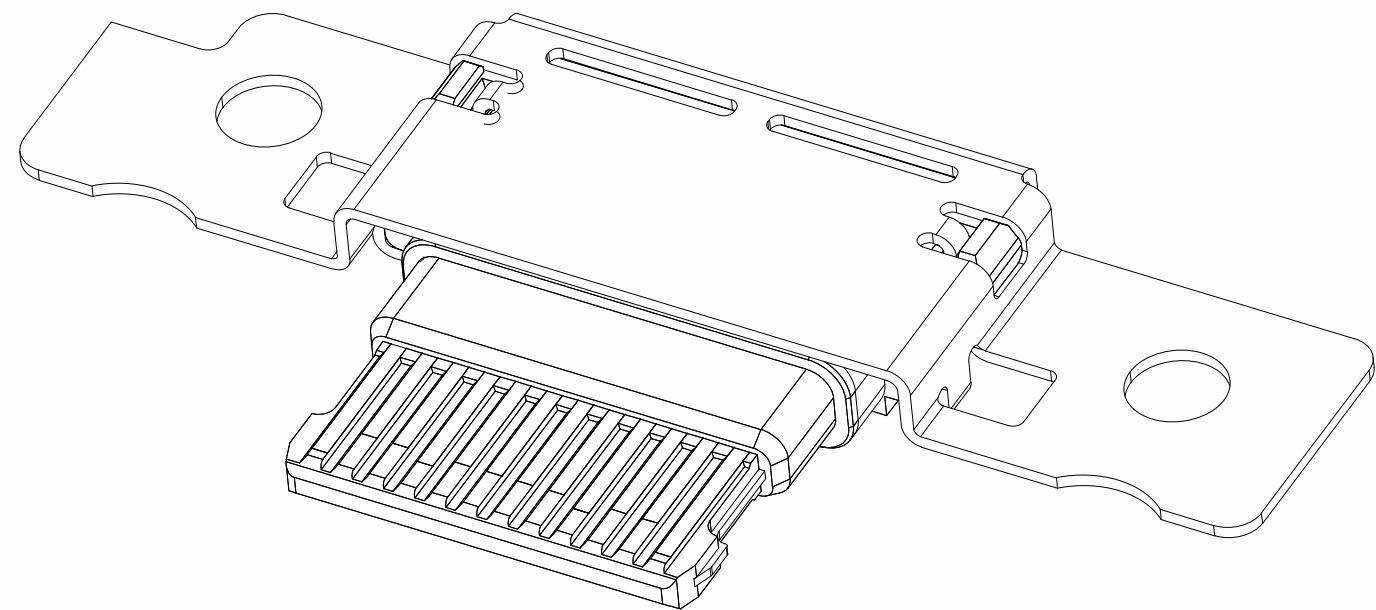
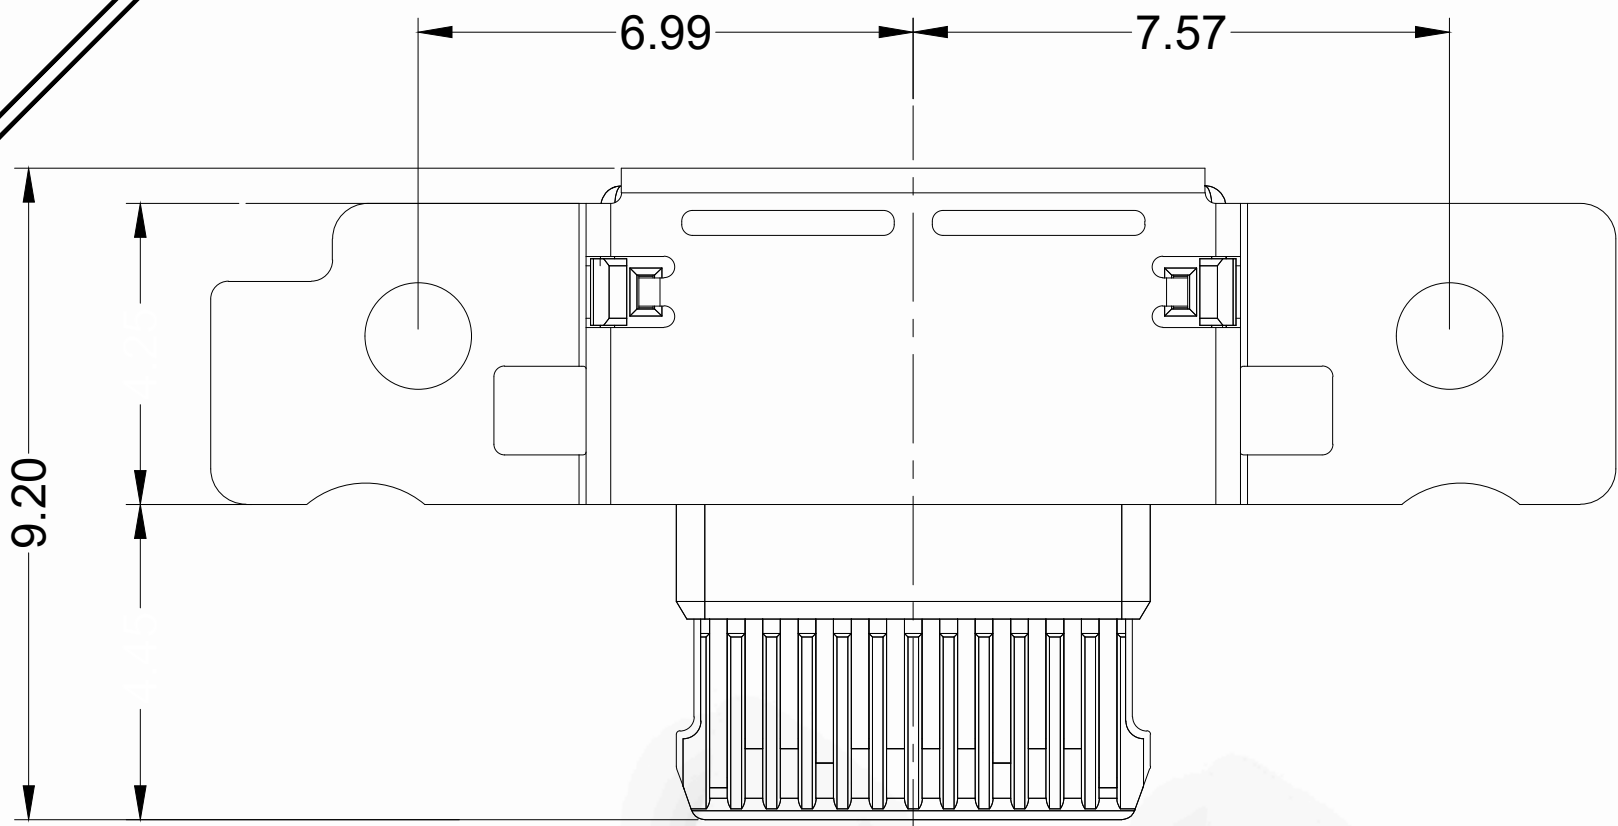
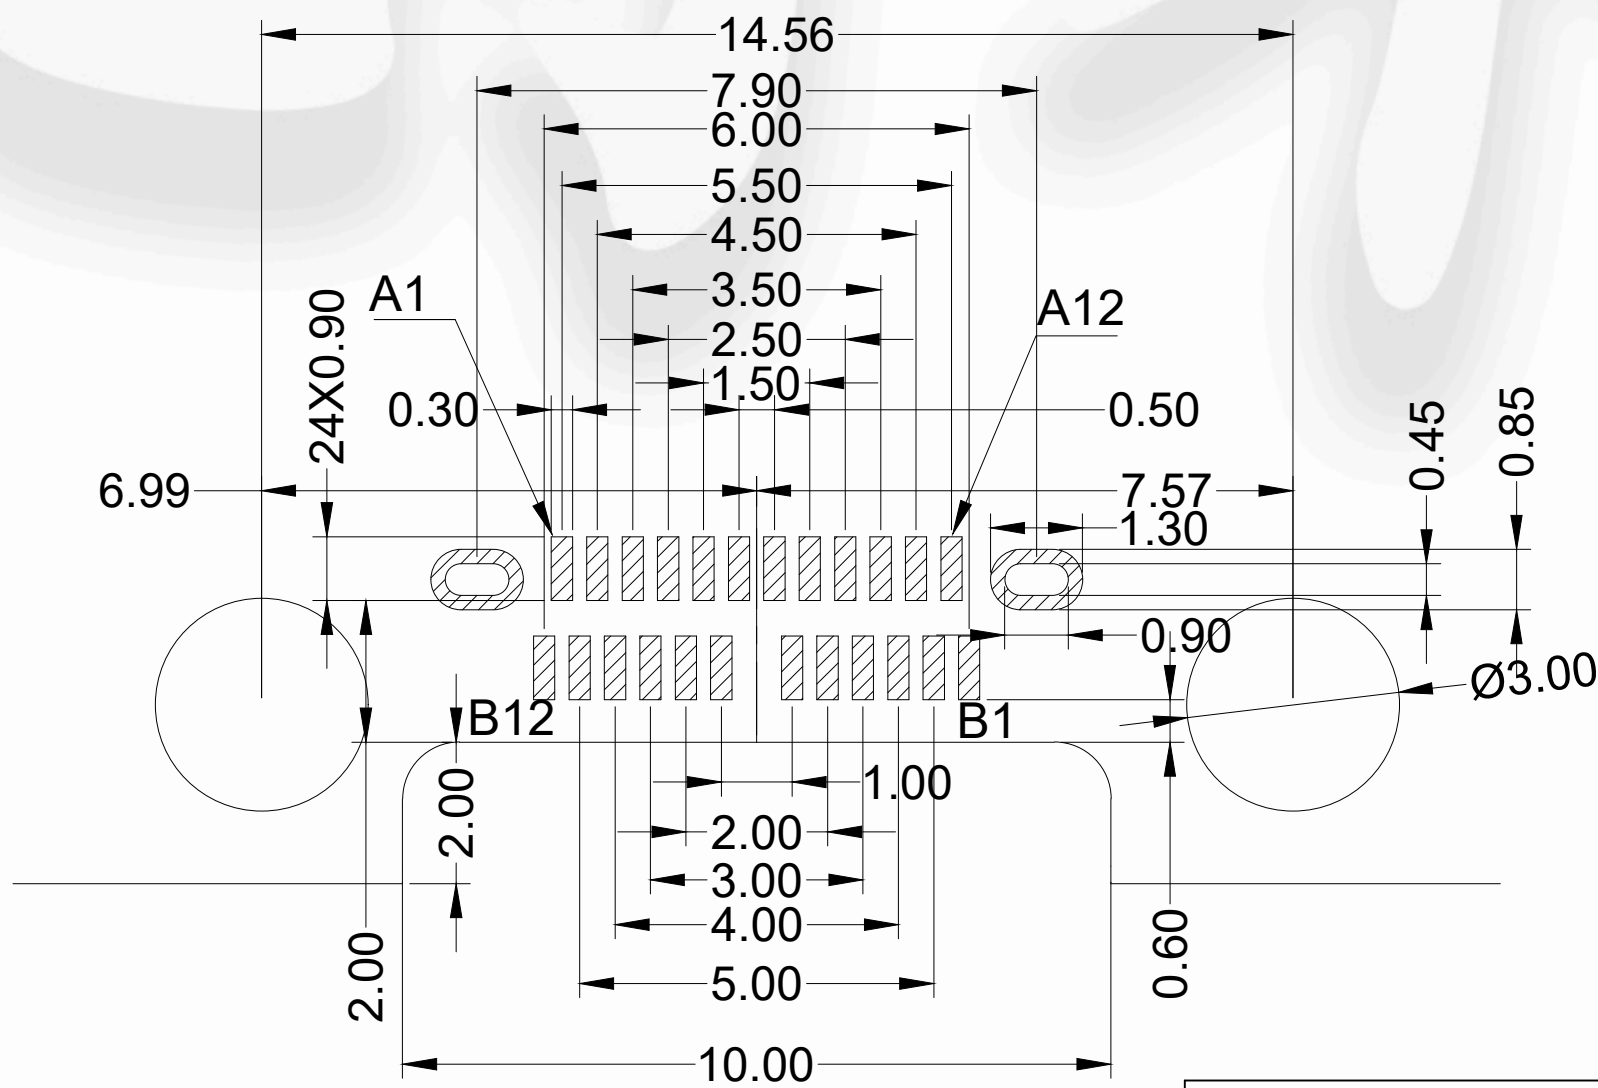
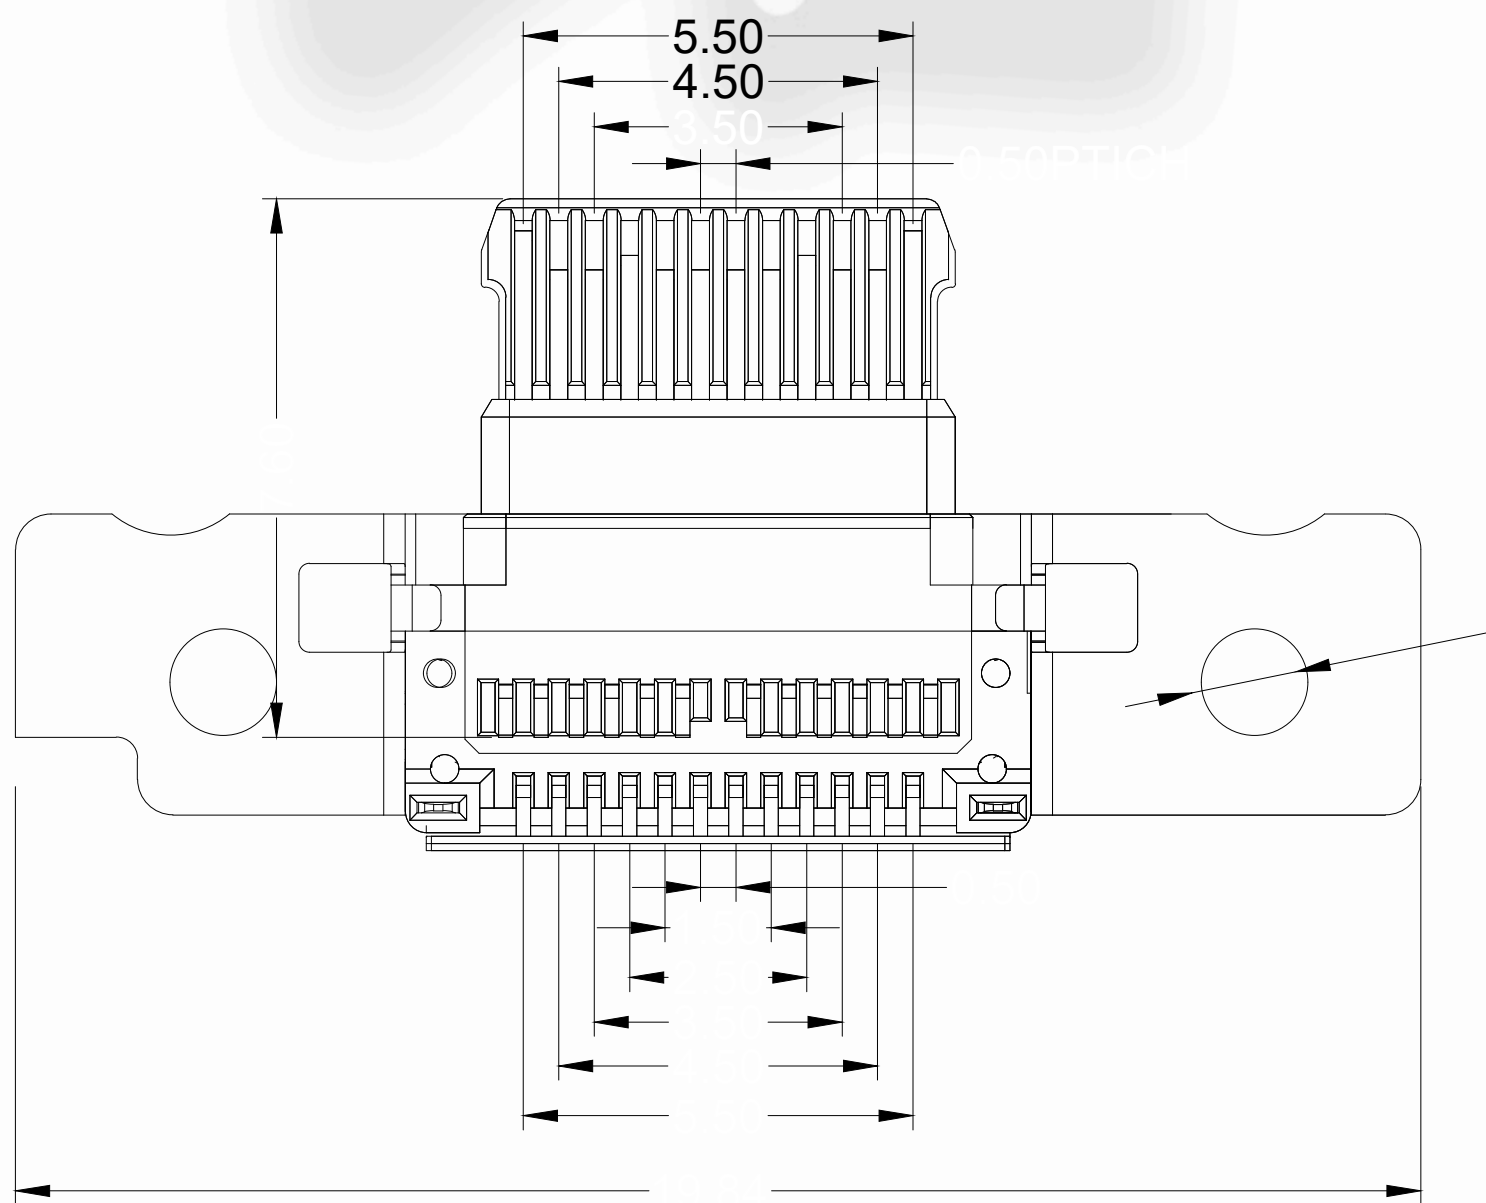
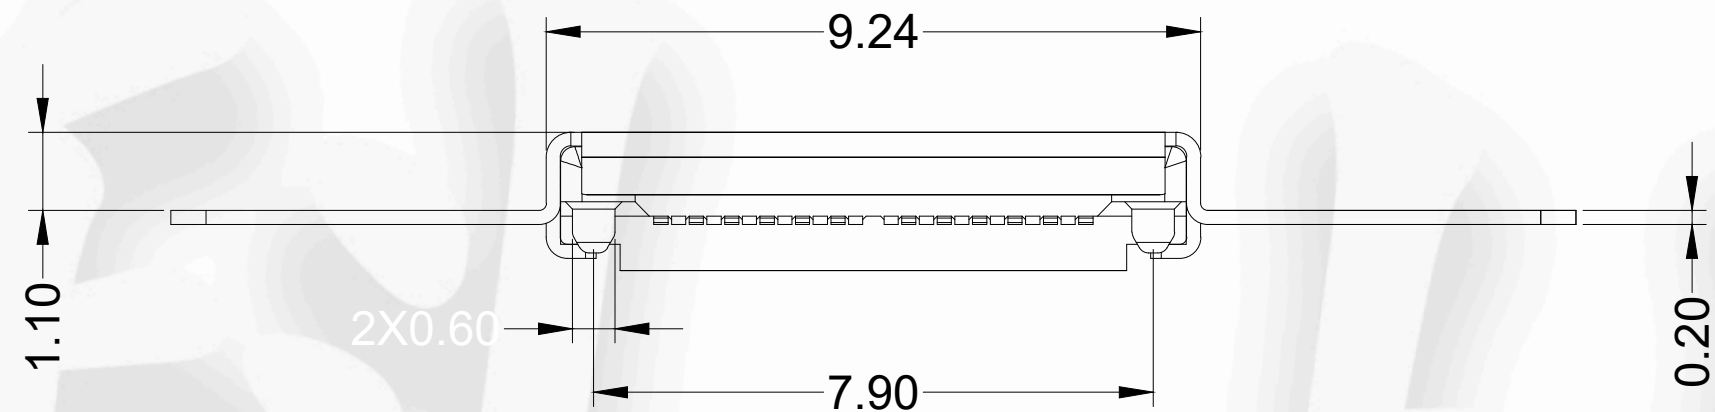


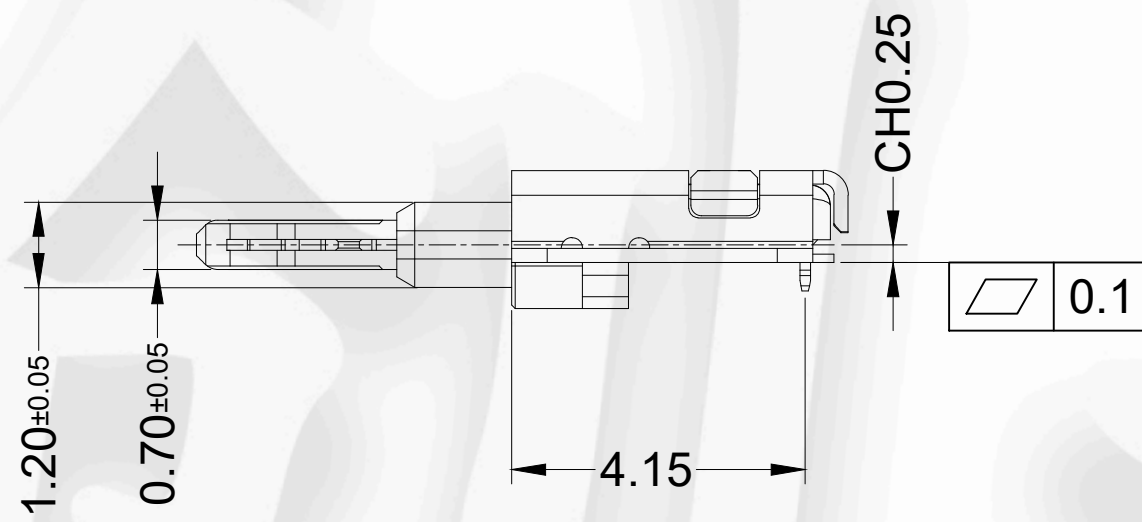

- SPECIFICATION:**
- 1.CURRENT RATING: 5.0 A
  - 2.VOLTAGE RATING: 5.0 V
  - 3.VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX  
SHIELD: 50mΩ/MAX  
LLCR MAX. CHANGE OF ALL PINS: 10Ωm
  - 4.INSULATION RESISTANCE: 100MΩ MIN
  - 5.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1MINUTE
  - 6.INSERTION FORCE: 0.5~2.0kgf
  - 7.UNMATING FORCE: 0.8-2.0kgf
  - 8.DURABILITY: 10000 CYCLES
  - 9.OPERATING TEMPERATURE: -25°C~+85°C
  - 10.THE PEAK TEMPERATURE ON THE BOARO SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C

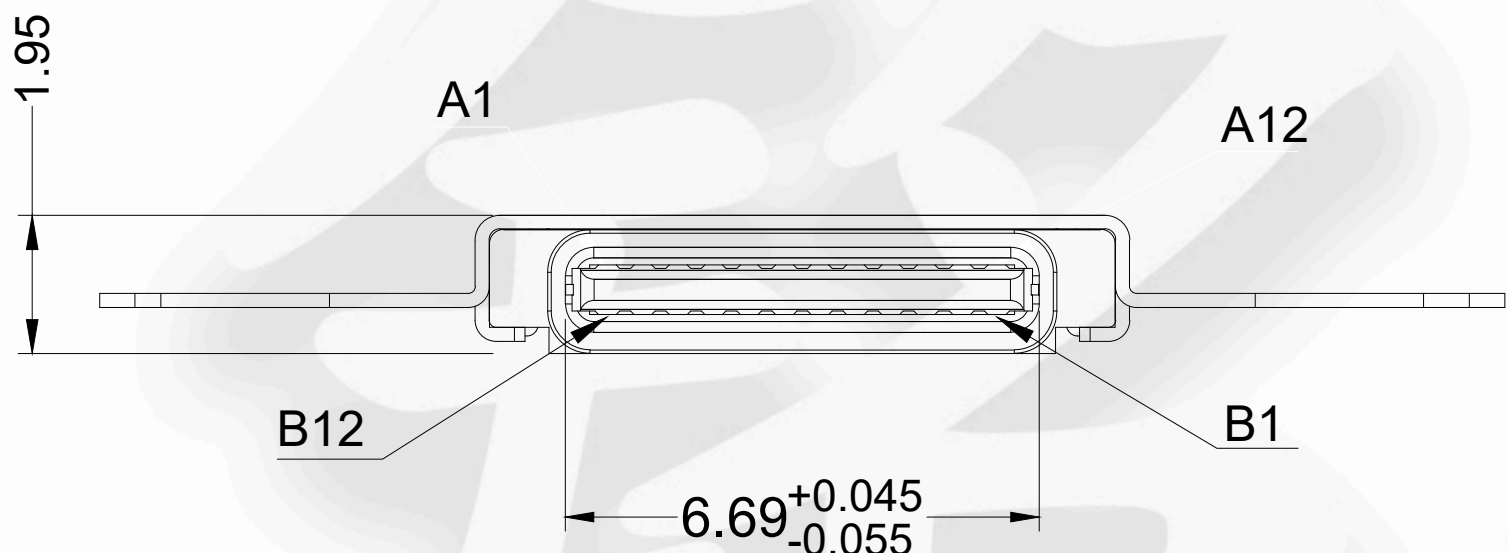


|     |        |        |      |      |    |    |      |      |        |        |     |
|-----|--------|--------|------|------|----|----|------|------|--------|--------|-----|
| A1  | A2     | A3     | A4   | A5   | A6 | A7 | A8   | A9   | A10    | A11    | A12 |
| GND | SSTXP1 | SSTXN1 | VBUS | CC1  | D+ | D- | SBU1 | VBUS | SSRXN2 | SSRXP2 | GND |
| B12 | B11    | B10    | B9   | B8   | B7 | B6 | B5   | B4   | B3     | B2     | B1  |
| GND | SSRXP1 | SSRXN1 | VBUS | SBU2 | D- | D+ | CC2  | VBUS | SSTXN2 | SSTXP2 | GND |

|     |           |                          |                            |
|-----|-----------|--------------------------|----------------------------|
| 1   | SHELL     | SUS304                   | Ni PLATED                  |
| 2   | MID PLATE | STAINLESS STEEL          | SUS301 NO PLATED           |
| 3   | HOUSING   | HIGH TEMPERATURE PLASTIC | PA9T BLACK UL 94 V-0       |
| 4   | CONTACT   | COPPER ALLOY(C7025)      | Au PLATING ON CONTACT AREA |
| 5   | GND PLATE | STAINLESS STEEL          | SUS304 NO PLATED           |
| NO. | PARTS     | MATERIAL                 | REMARKS                    |






| CUSTOMER DRAWING                                                              |               |                 | 铭创科技（东莞）有限公司                                  |  |                     |            |
|-------------------------------------------------------------------------------|---------------|-----------------|-----------------------------------------------|--|---------------------|------------|
| UNITS<br>mm                                                                   | SCALE<br>1:1  | SHEET<br>1 OF 2 | Mingchuang Technology (Dongguan) Co., Ltd.    |  |                     |            |
| PROJECTION:<br>                                                               | DRAW:<br>DAP  |                 | TITLE<br>TYPE C母座24PIN 沉板超薄款 露舌带锁孔<br>CH=0.25 |  |                     |            |
| GENERAL TOLERANCE<br>.000 ±0.02<br>.00 ±0.10<br>.0 ±0.20<br>.0 ±2°<br>.00 ±1° | CHECK:<br>HWT |                 | MAT'L<br>SEE TABLE                            |  | FINISH<br>SEE TABLE |            |
|                                                                               | APPD:<br>HHM  |                 | DWG. NO.<br>2162. TCF. 24CB. Y5               |  | PART NO.<br>_____   | SIZE<br>A4 |





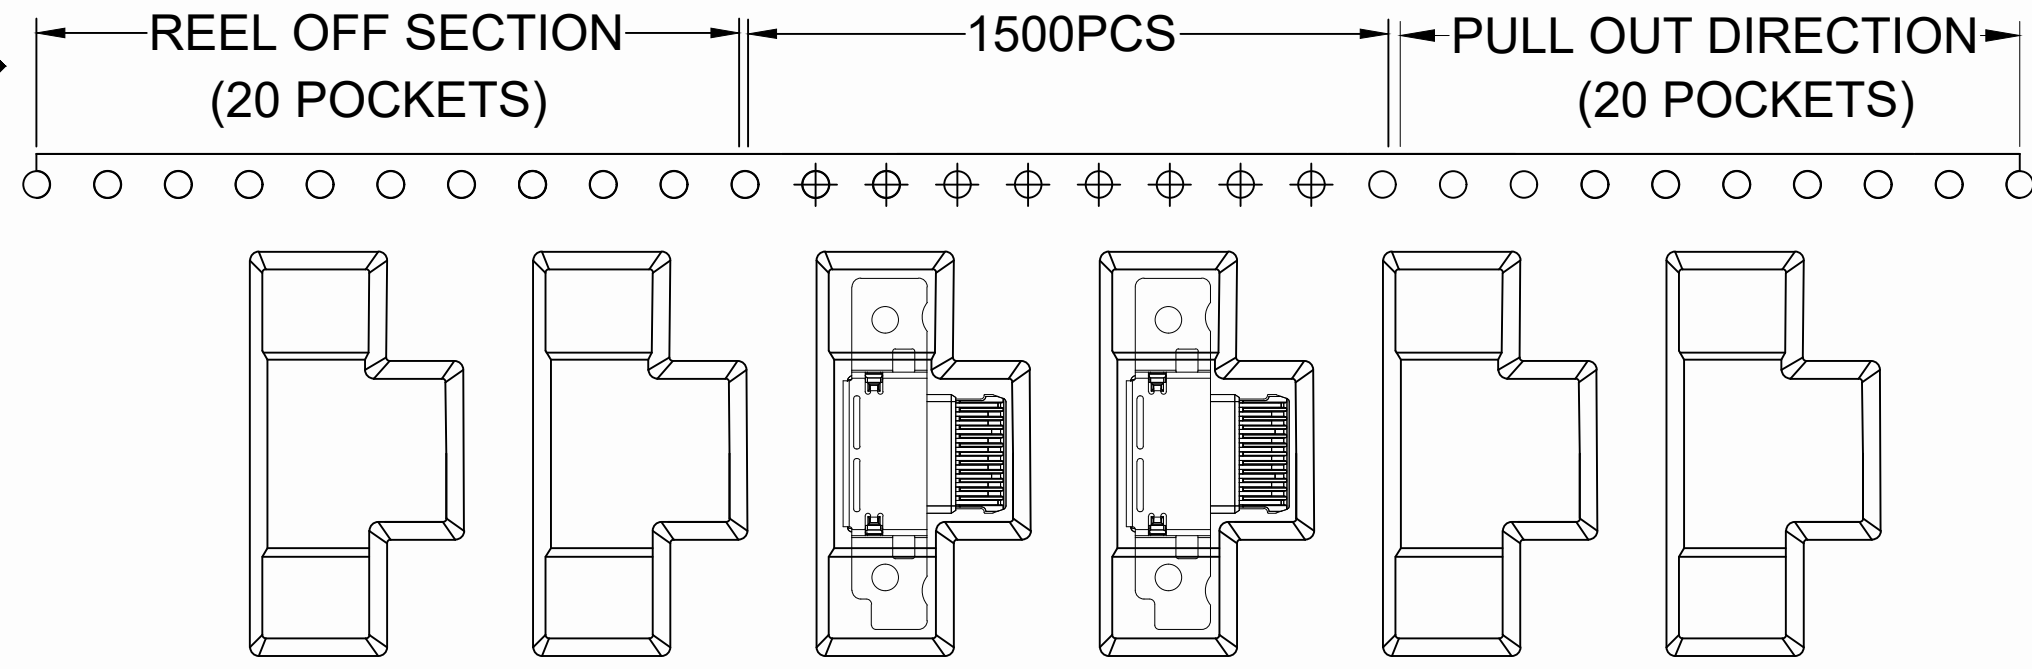


SEE DETAIL X

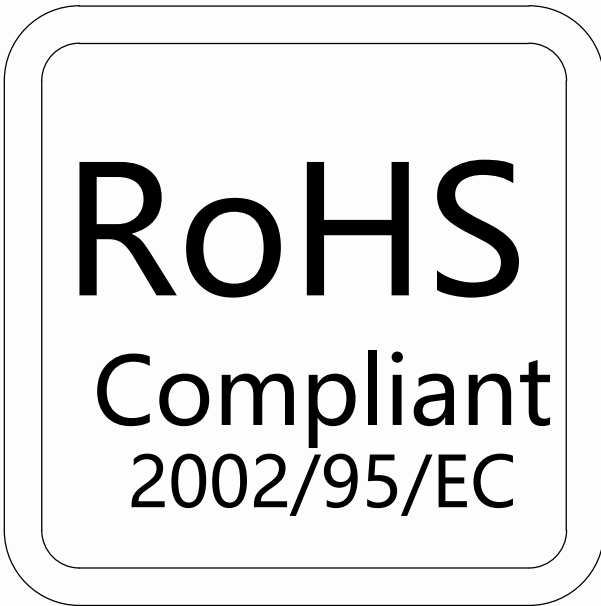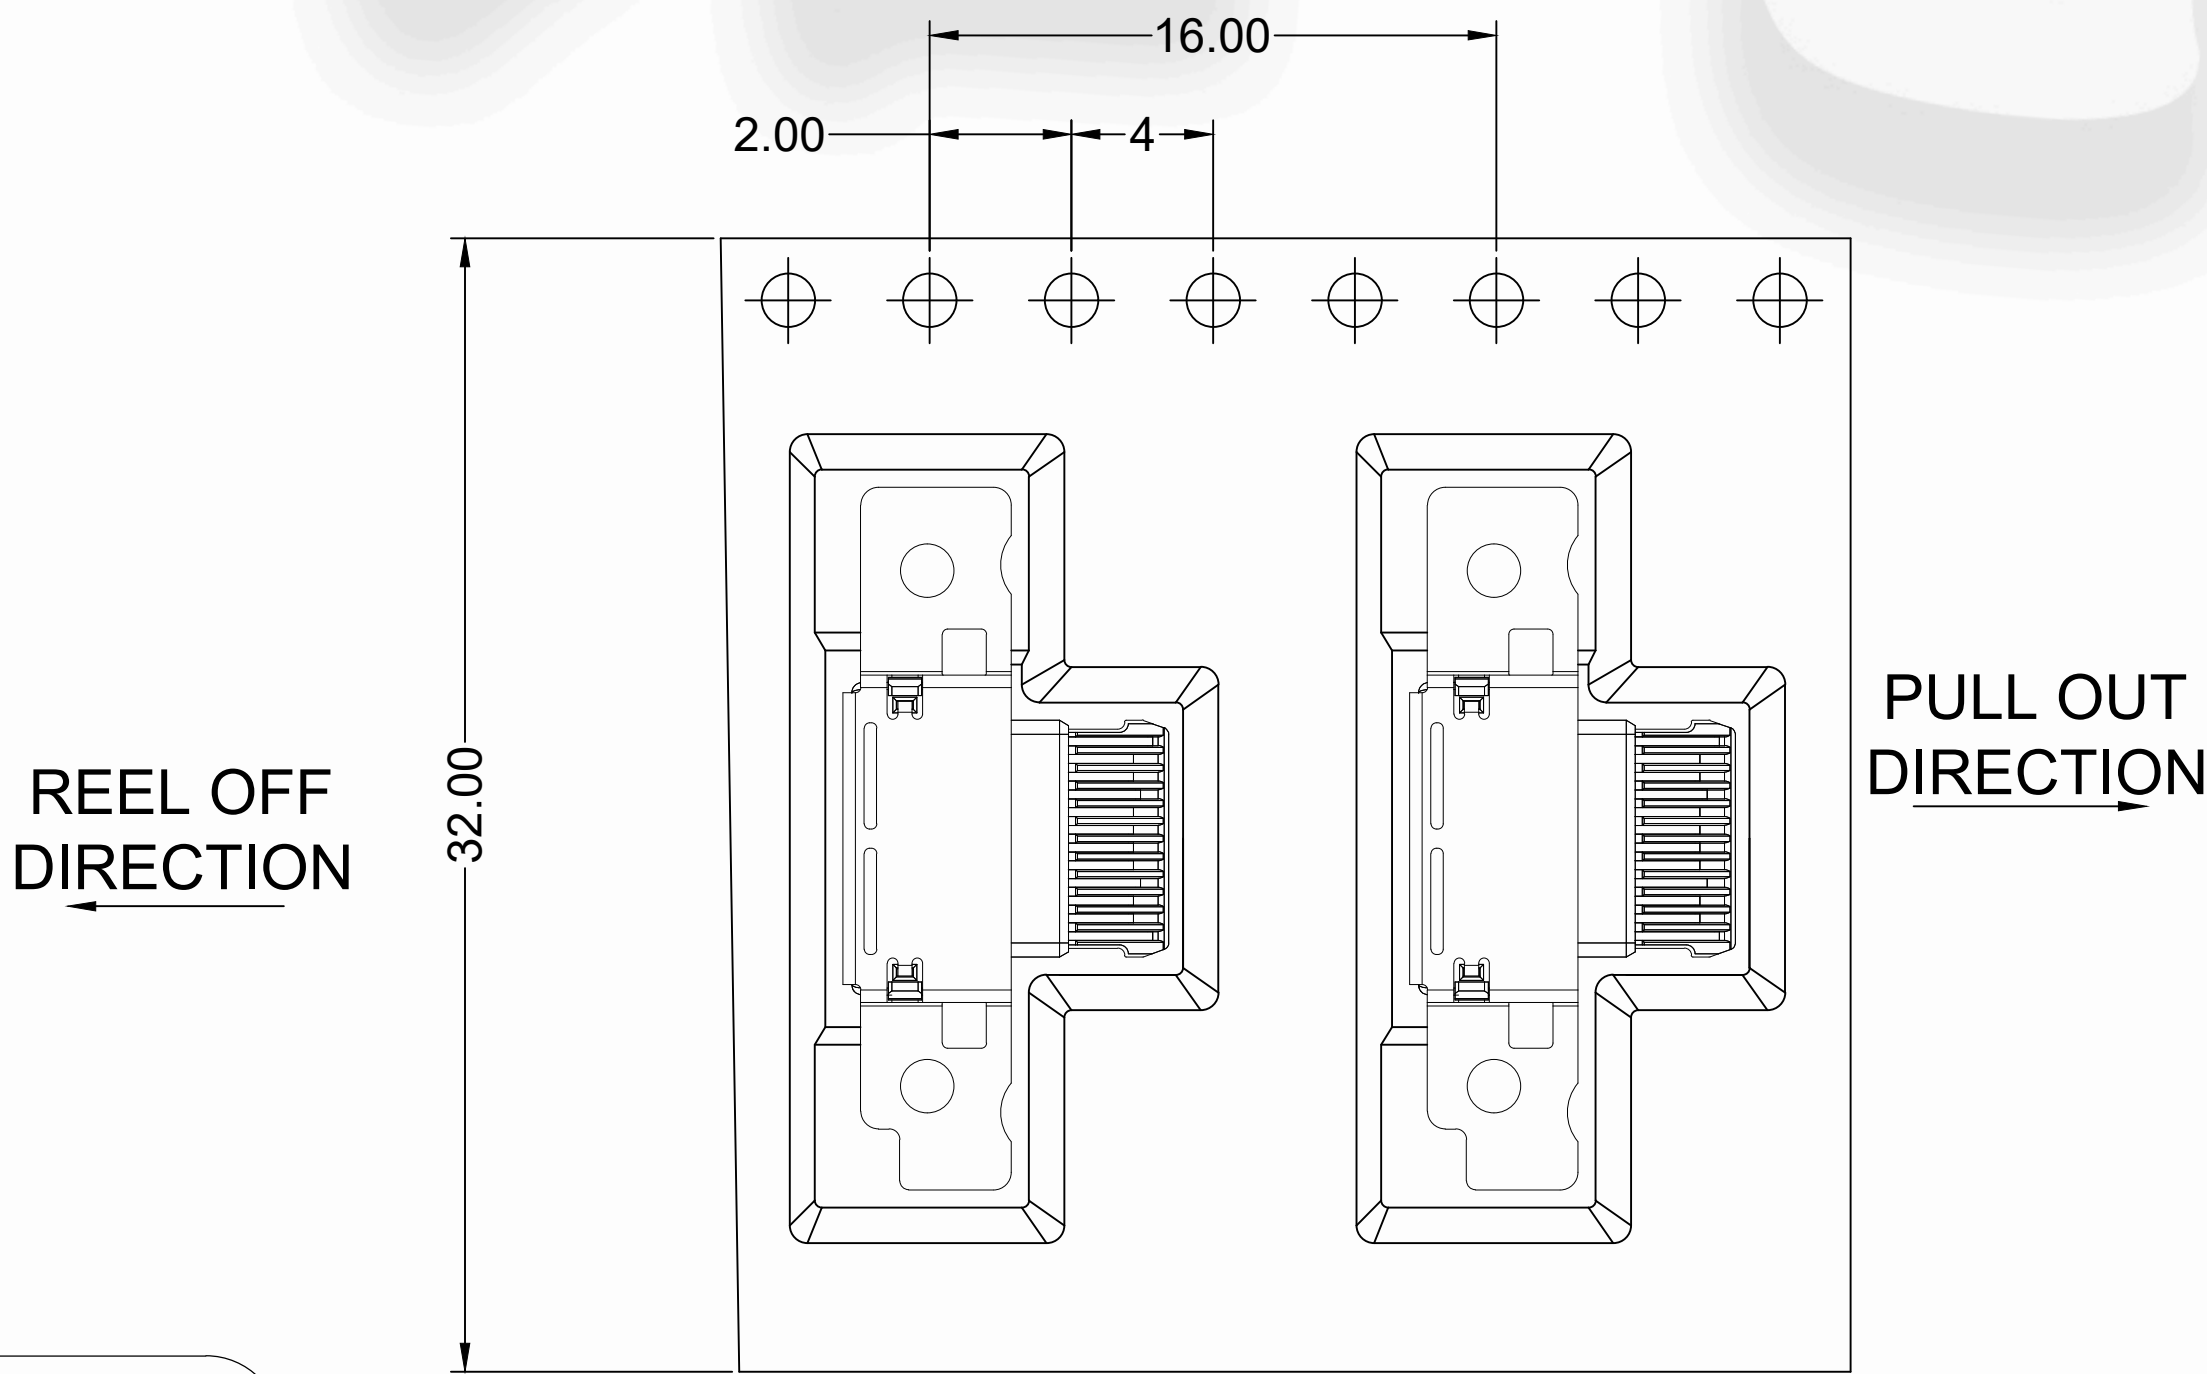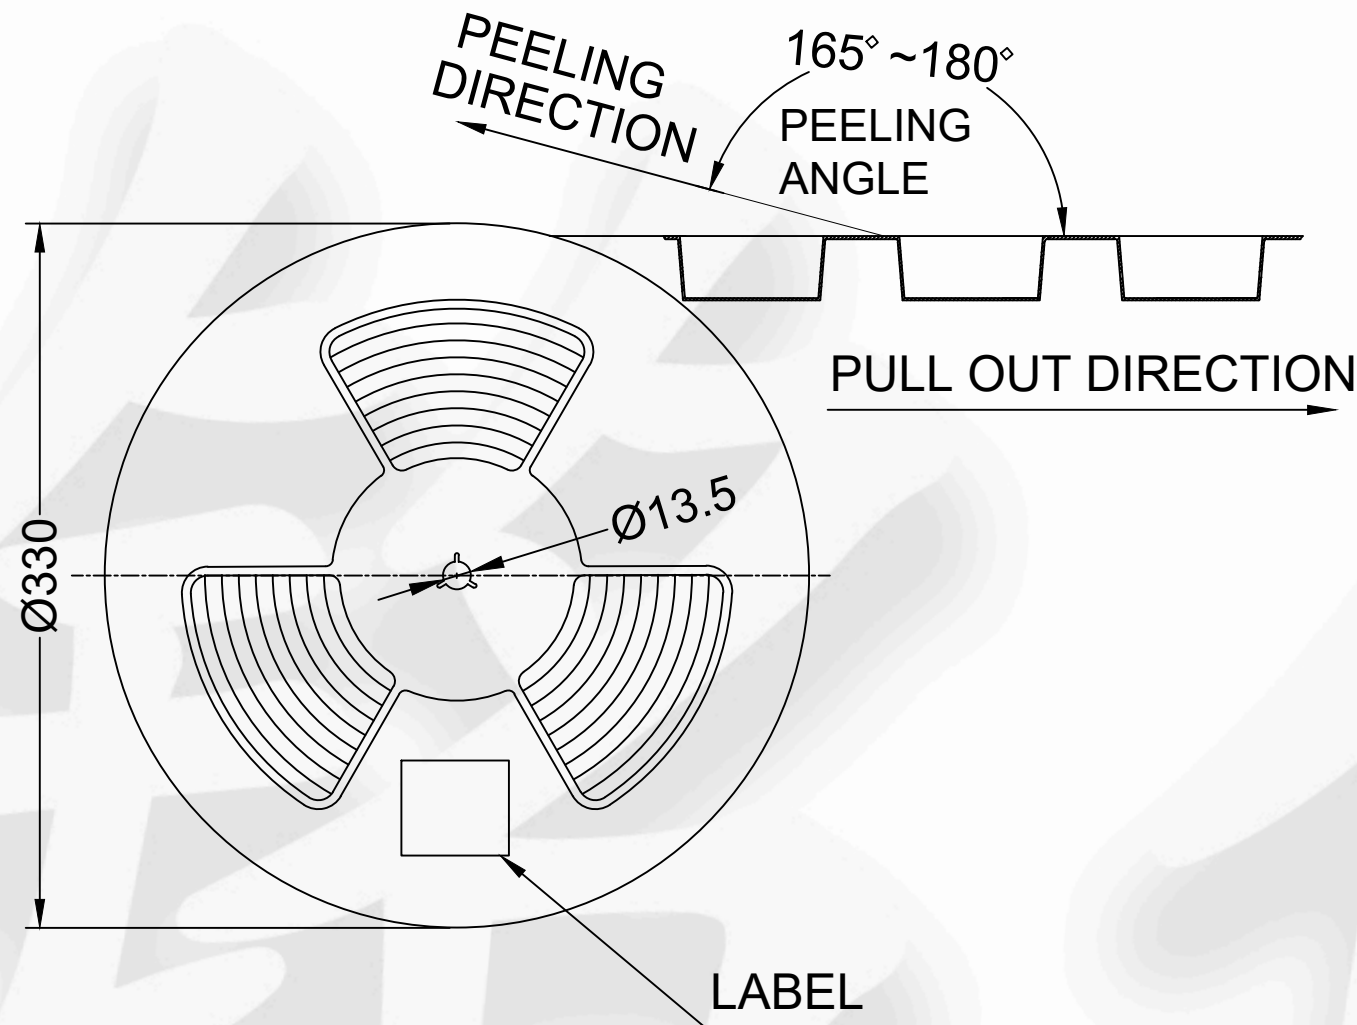

| REV | DESCRIPTION | DATE         | APPROVED |
|-----|-------------|--------------|----------|
| A   | 新版发行        | 2020. 11. 06 | HHM      |

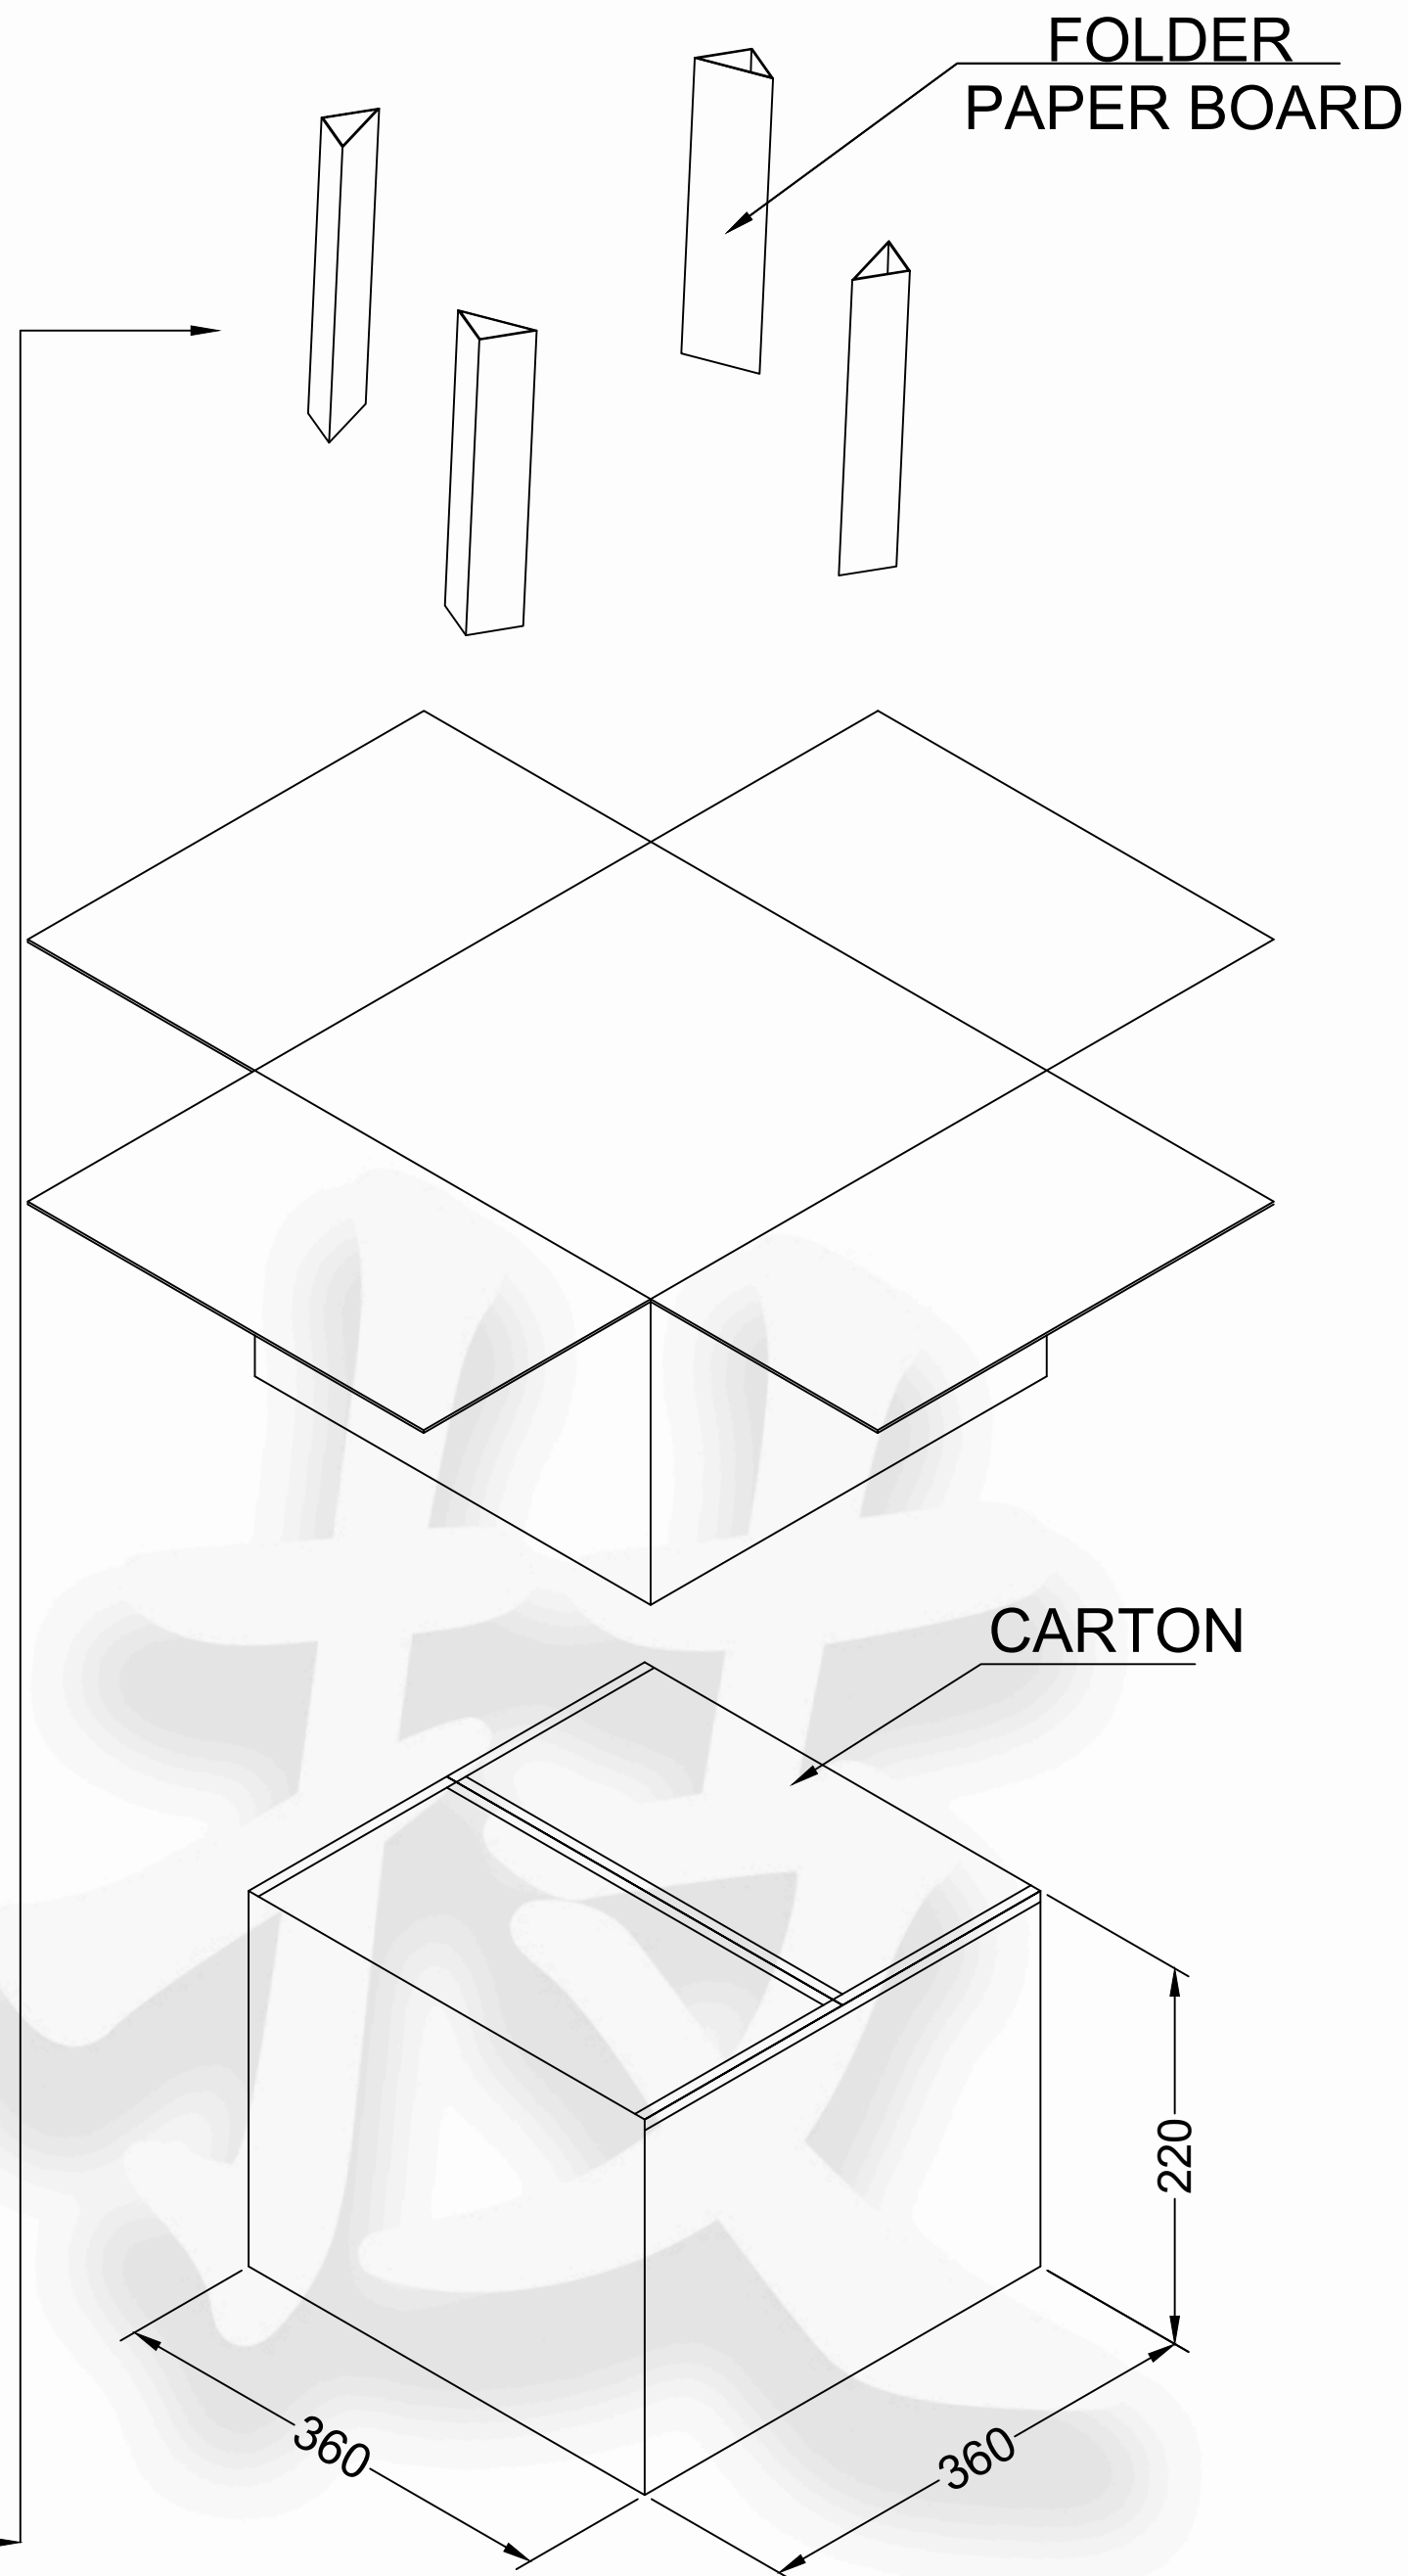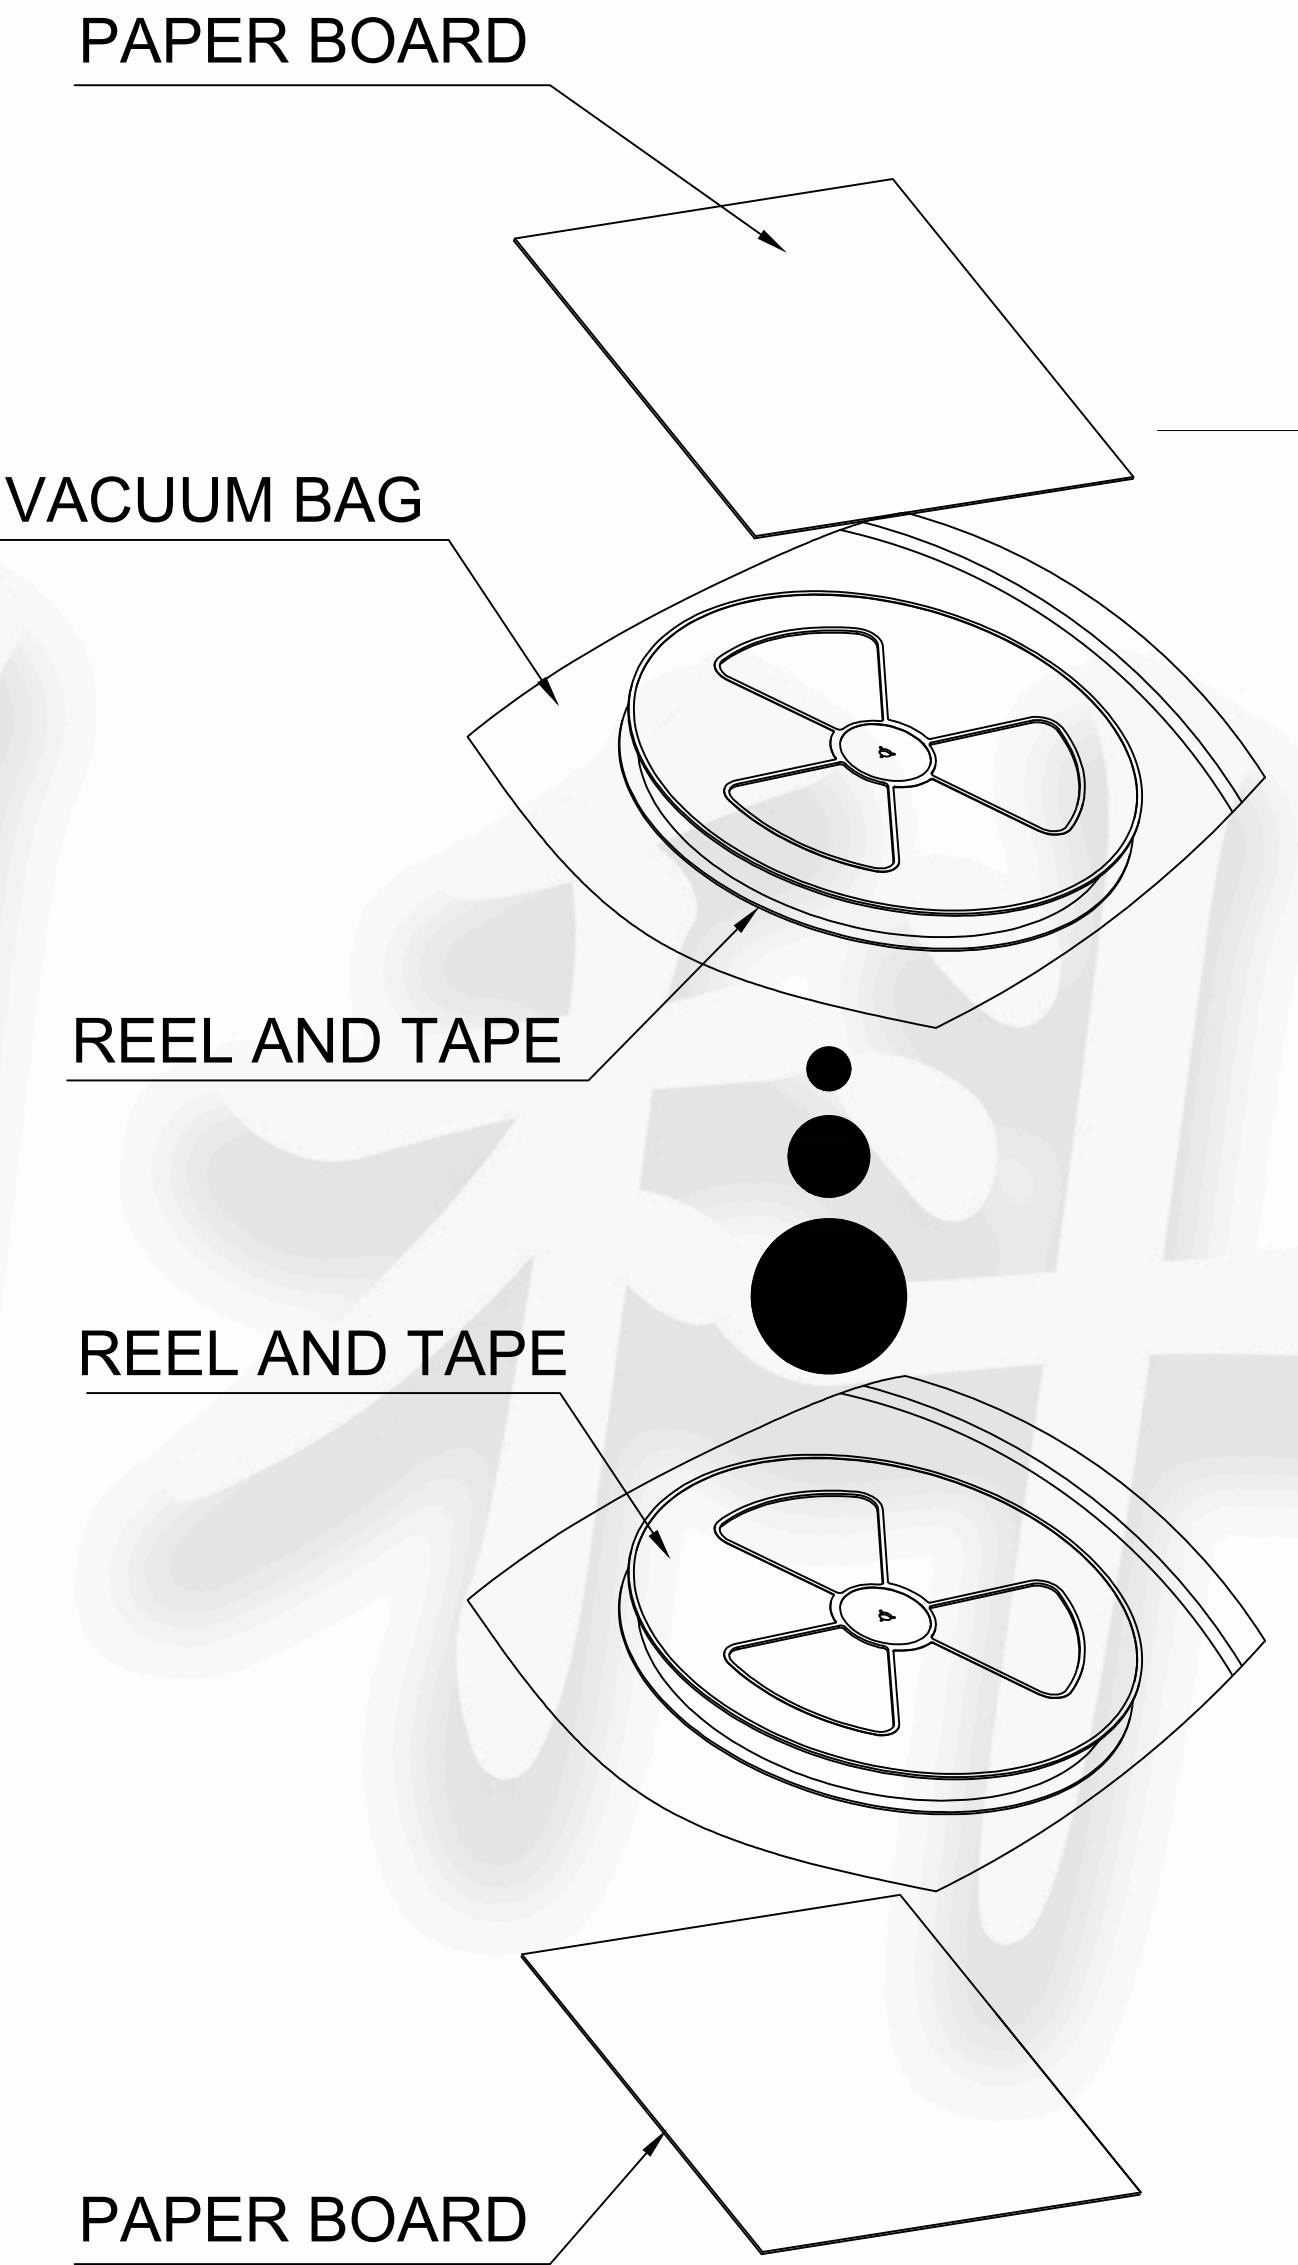

|                 | REEL | CARTON |
|-----------------|------|--------|
| CONNECTOR (PCS) | 1500 | 9000   |
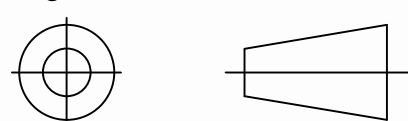
| CUSTOMER DRAWING                                                                                     |              |                 | 铭创科技（东莞）有限公司                                  |                     |            |
|------------------------------------------------------------------------------------------------------|--------------|-----------------|-----------------------------------------------|---------------------|------------|
| UNITS<br>mm                                                                                          | SCALE<br>1:1 | SHEET<br>2 OF 2 | Mingchuang Technology (Dongguan) Co., Ltd.    |                     |            |
| PROJECTION:<br> |              | DRAW:<br>DAP    | TITLE<br>TYPE C母座24PIN 沉板超薄款 露舌带锁孔<br>CH=0.25 |                     |            |
| GENERAL TOLERANCE<br>.000 ±0.02<br>.00 ±0.10<br>.0 ±0.20<br>.0 ±2°<br>.00 ±1°                        |              | CHECK:<br>HWT   | MAT' L<br>SEE TABLE                           | FINISH<br>SEE TABLE |            |
|                                                                                                      |              | APPD:<br>HHM    | DWG. NO.<br>2162. TCF. 24CB. Y5               | PART NO.<br>_____   | SIZE<br>A4 |