
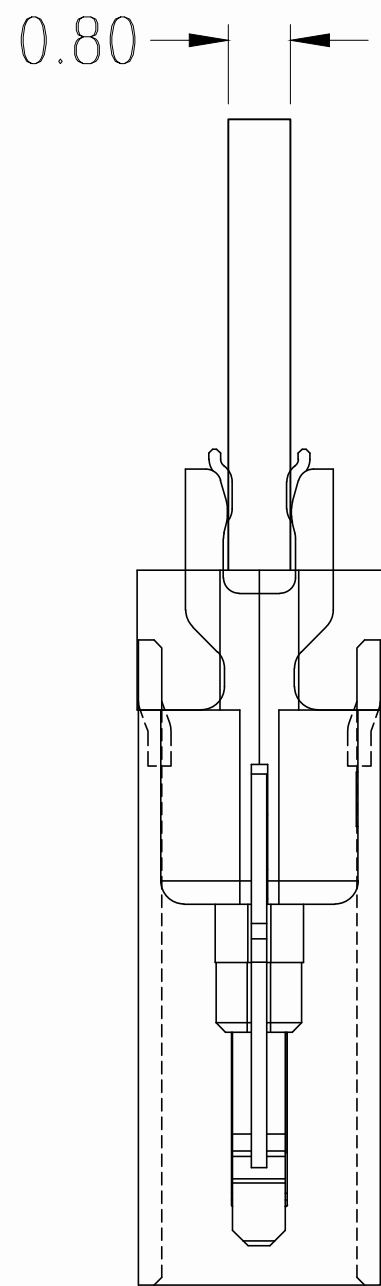
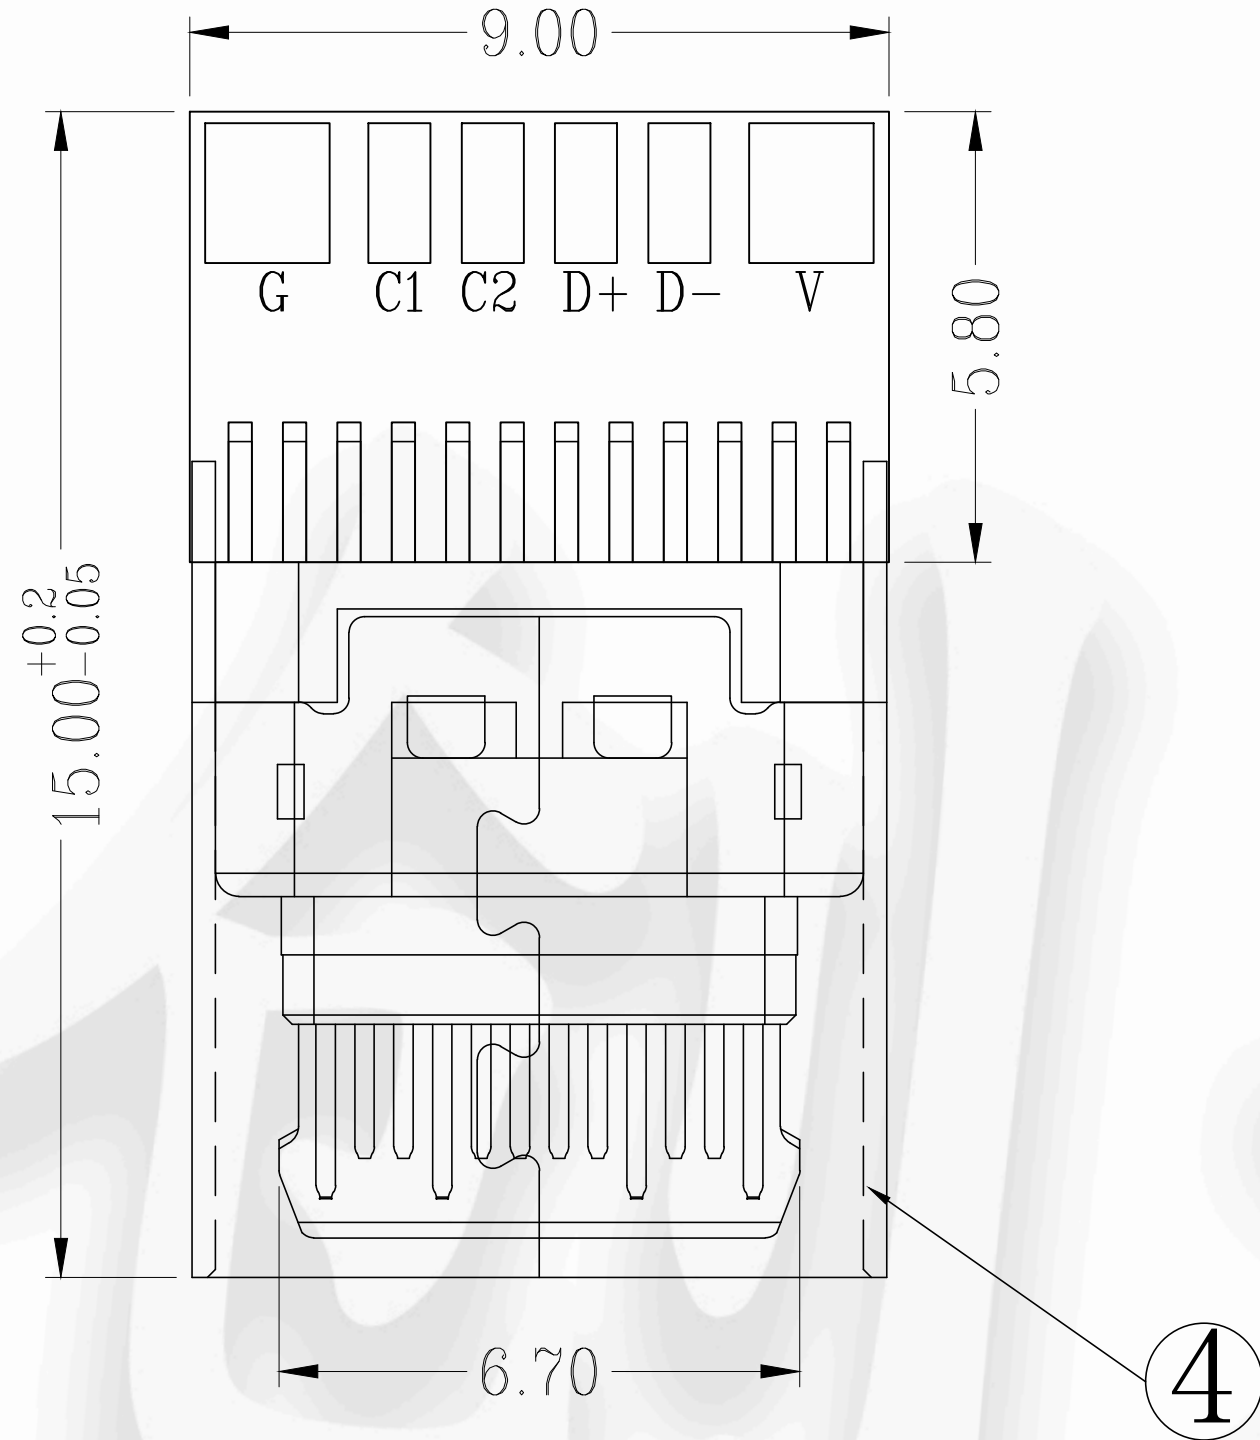
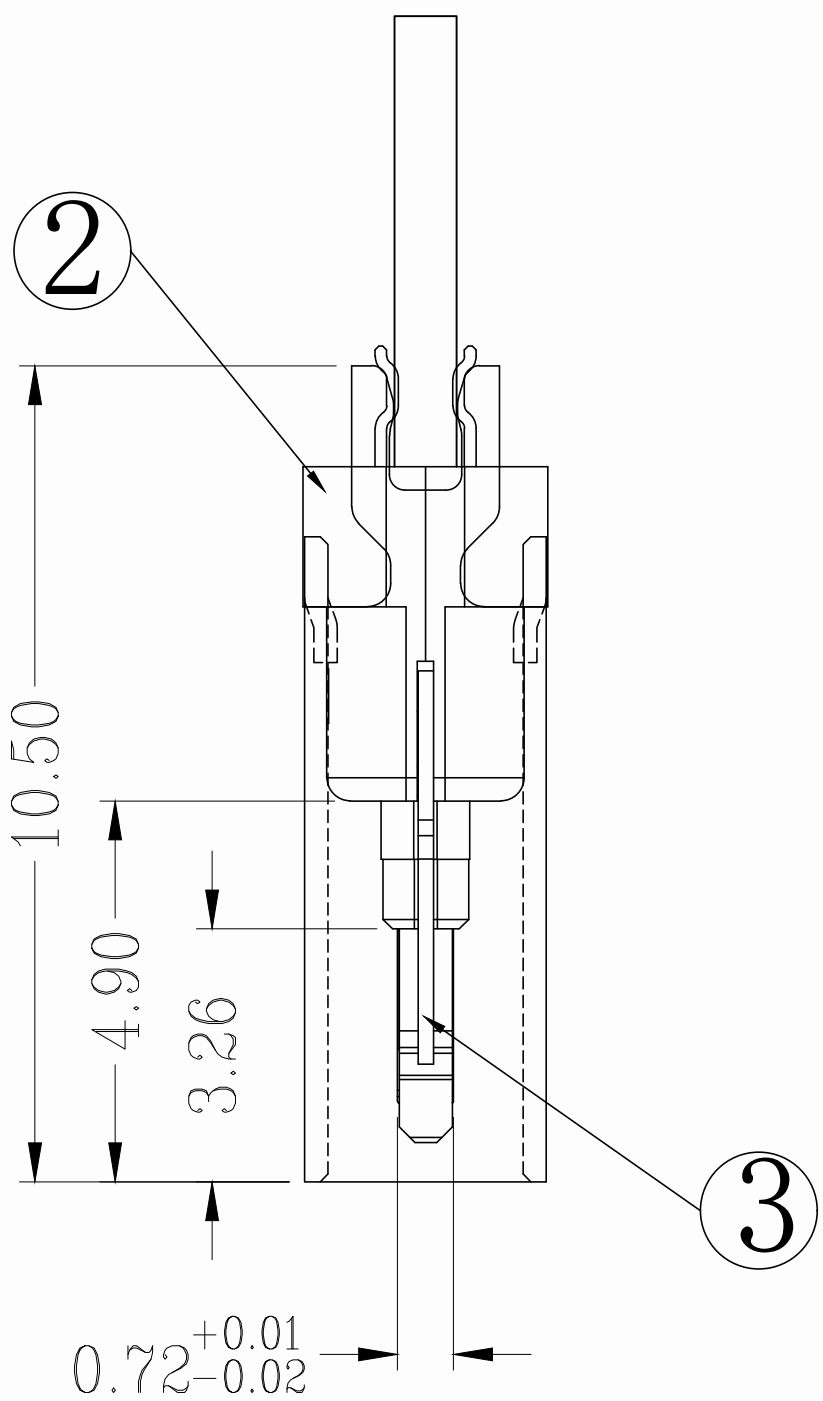
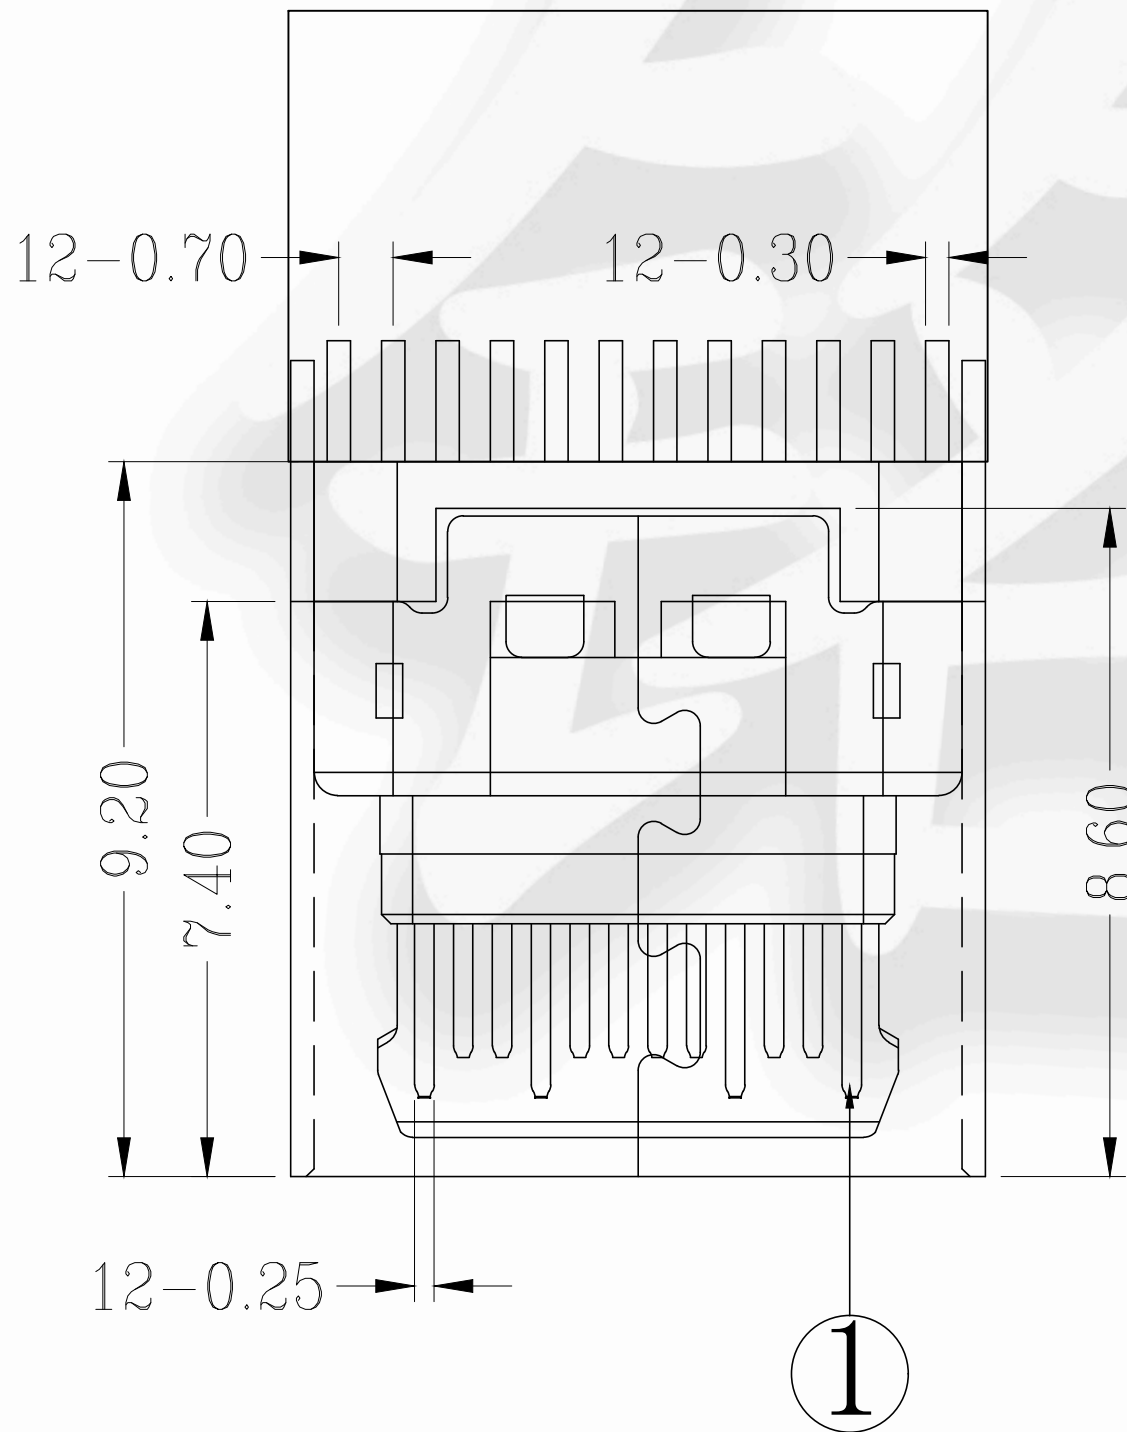


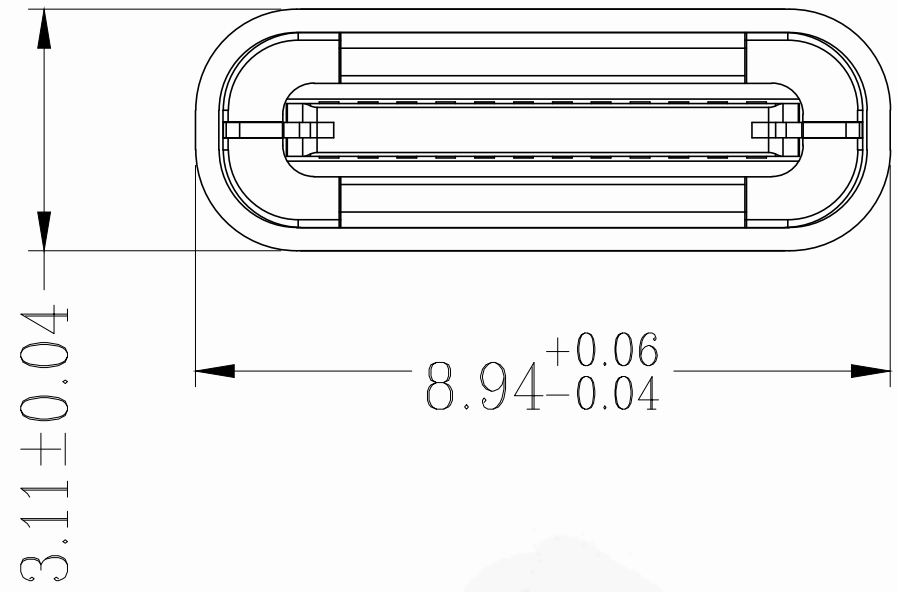

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:LCP,UL94 V-0
1-2.CONTACTS: C1814
1-3.SPRING:STAINLESS STEEL
1-4.FRONT SHELL: STAINLESS STEEL
1-5.SHIELDING PLATE: STAINLESS STEEL
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD PLATING ALL OVER 50u” Min NICKEL
AND 100u”Min Tin ALL OVER 50u” Min NICKEL
ON SOLDER AREA
2-2.FRONT SHELL&SHIELDING PLATE:
Ni 30u” MIN. UNDER PLATED OVER ALL.
2-3.SPRING:
CLEAR ONLY.
3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 0.5~2.0kgf.
3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
3-3.DURABILITY: 10000 CYCLES.
4.ELECTRICAL PERFORMANCE,
4-1. CURRENT RATING:5.0A
VOLTAGE RATING:5.0V
4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40m?/PIN MAX.
SHIELD: 50m?/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10m?.
4-3.INSULATION RESISTANCE: 100M? MIN
4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
6.IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

6		
5	钢壳	材质SUS201镀珍珠镍
4	中夹片	材质SUS201 T=0.2MM
3	卡勾	
2	塑胶	材质LCP, 黑色
1	端子	材质C2680 T=0.15 , 镍底80u”, 贴板区镀锡100u”, 接触区镀金1u”
项目	名称	规格要求

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm	SCALE 1:1	SHEET 1 OF 1	TITLE 24PIN 夹板母座 六个焊盘 并一排		
PROJECTION: 	DRAW: DAP		MAT'L SEE TABLE		
GENERAL TOLERANCE 0. ±0.15 0.0 ±0.10 0.00 ±0.05 0.° ±3° 0.0° ±1°	CHECK: HWT		FINISH SEE TABLE		
	APPD: HHM		DWG. NO. 0382. TCF. 24YB. S93	PART NO. _____	SIZE A4